

Wireless Battery LED Uplighting Item

Item Model: C-PAR 1210A

12 X 15W Wireless Battery LED Uplight (Wireless DMX, Battery Operated, Remote)

Optional Colors:

- 1) RGBW 4in1 Color
- 2) RGBWA 5in1 Color
- 3) RGBWA + UV 6in1 Color

Advantages:

- 1) Built in Battery Indicator (10 bars battery indicator display)
- 2) Battery Operated Continuously Working Time: 5-10 Hours
- 3) PowerCon In/Out Connector
- 4) Perfect Lighting - High Quality - Good Price

Description:

Input voltage: AC90V-240V/50-60HZ
 Power consumption: 180W
 Light source: 12PCS high brightness 15W LEDs
 LED angle: 25 or 45 degree
 Life time: 6-10 million hours
 Lumen output: 3200 lm
 Color: 1670 kinds of colors
 Control mode: Wireless DMX512, DMX512, Master-slave, auto run, sound activated
 Channel: 4/5/6/9 CH
 Digital display Menu
 Battery type: Lithium iron phosphate
 Battery charge time: 4 hrs (when connected to mains)
 Durability: 20000 charge cycles
 With battery indicator (10 bars battery indicator display)
 PowerCon Connector in/out
 Continuously Working Time: 5-12 hours
 Built-in 2.4G wireless DMX512 receiver
 Inner packing: 290*160*270mm
 Outer packing: 600*340*290mm(4PCS/CTN)
 Net weight: 3.6kg



Black Housing



White Housing



With battery Indicator
 PowerCON In/Our Connector
 Built in wireless receiver

battery life indicator



Infrared Remote Control



Wireless DMX 512 Transmitter/Receiver

Built in Charging Case


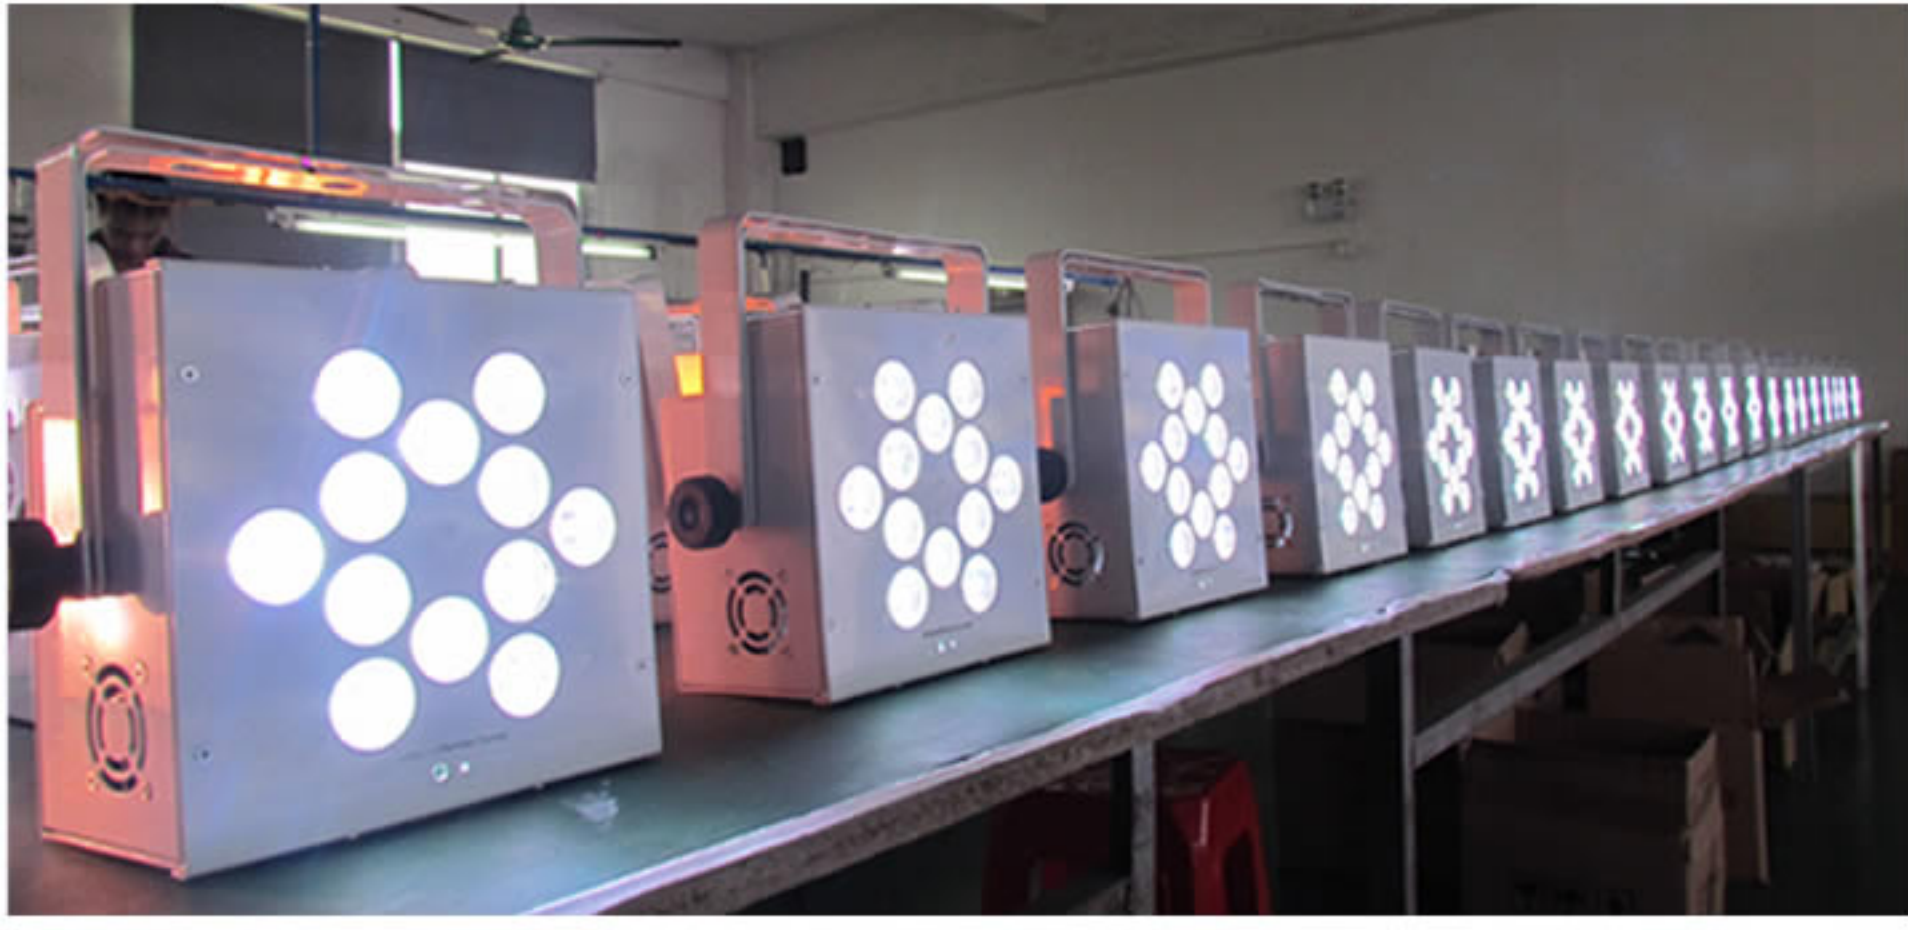


Photo Gallery

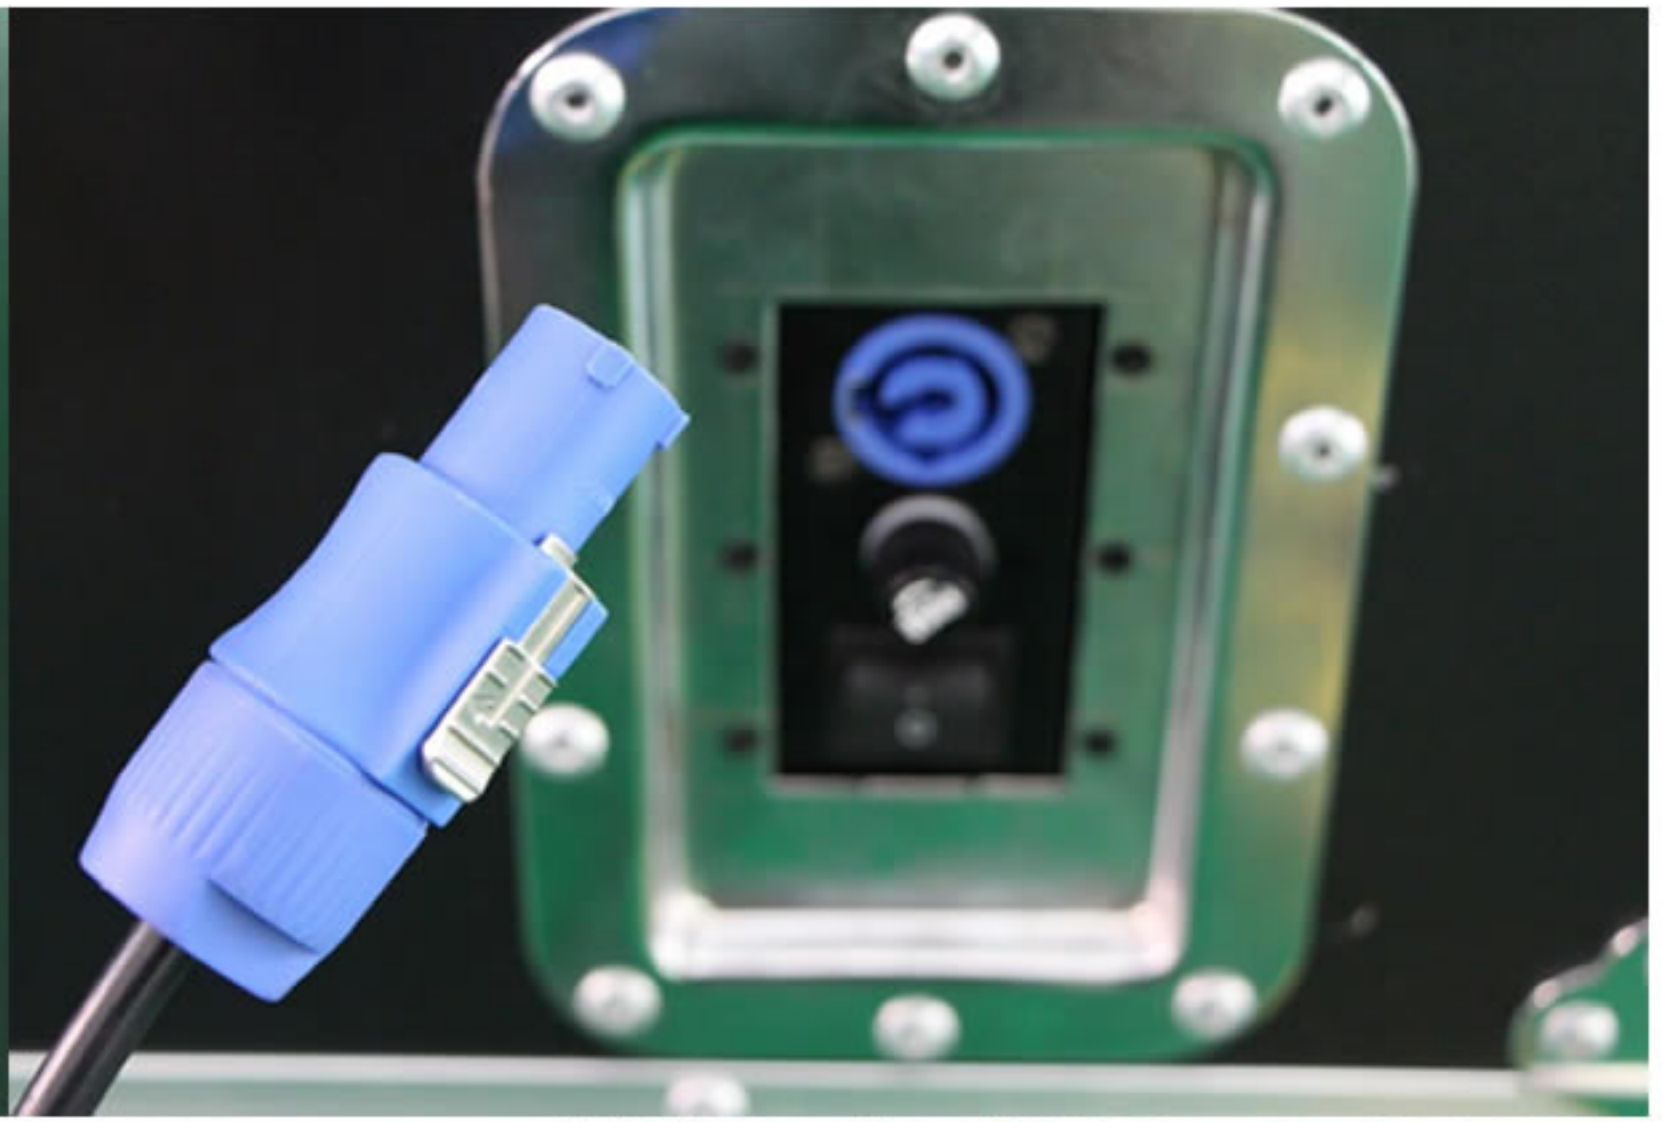